



PREMIER^(c) FACE LOUVERS

SWING OPEN CONFIGURATION

Stainless Steel Hinges (typ) COOLING UNIT HOUSING INTAKE Stainless Steel Hinges (typ)

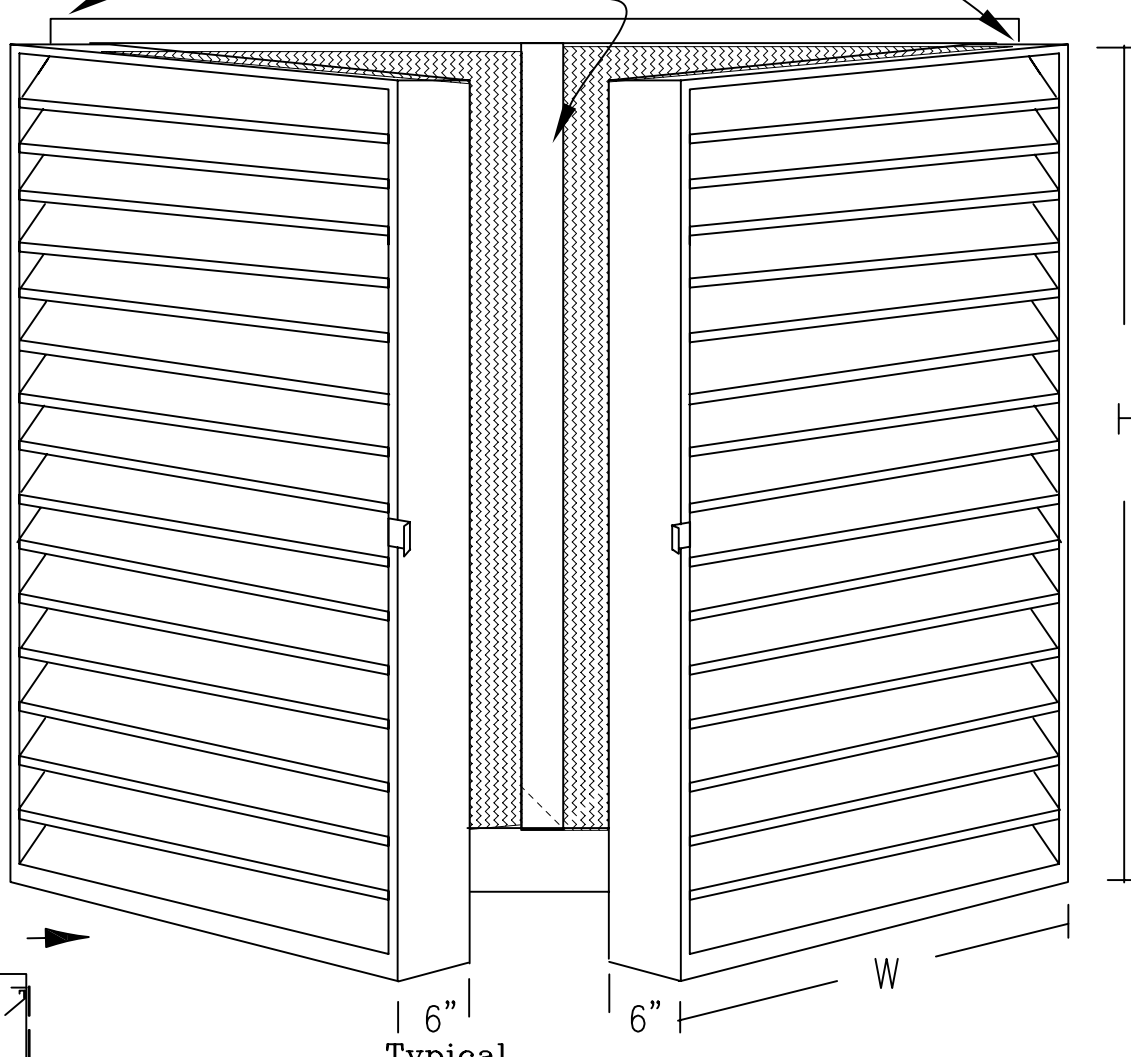

AIR FLOW →

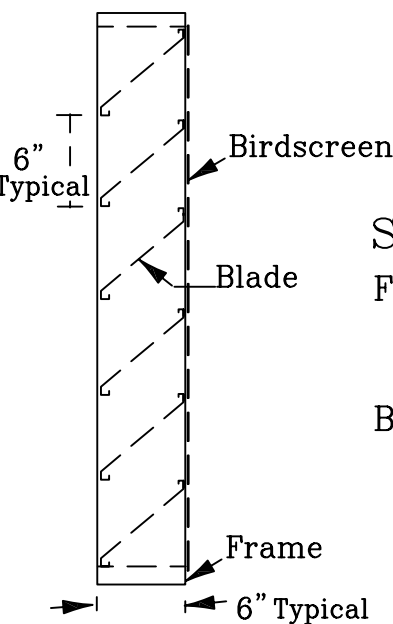

Specifications:

Frame: Aluminum alloy
5052H32, .080 thick.
MIG welded at corners.

Blades: Aluminum alloy
5052-H32, .080 thick.
MIG welded to frame.

Birdscreen: Aluminum perforated sheet, 1/4" opening. open area not less than 76%. Mounted to inside (air discharge) side of louver panel.

Sizes: "W" equal width "H" equals height. Made to custom size. Depth is 6" typically or as specified.

Lifting Lugs: provided on louvers weighing over 200 lbs. if specified.

NOTES:	REVISIONS:	Premier Industries, Inc.
		11050 N. 22nd Ave., Phoenix, AZ 85029
		Aluminum face louvers
		RFJ- louvers .dwg